


## FEATURES

- *Globe bodies for in-line service; angle bodies for difficult service. Each body style accepts all standard trim sets.*
- *Balanced plugs for use with smaller more economical actuators. Unbalanced plugs for simplicity of design, fewer parts, and ease of maintenance.*
- *Standard linear or equal percentage characterized ported cages; optional linear or equal percentage Flash Flo® cages for difficult applications.*
- *Q-Cage™ and Q-Cage™ Level 2 provide additional noise reduction and eliminates cavitation for more demanding applications.*
- *VeCTor™ trim eliminates the damaging effects of noise and erosion typically associated with severe service applications.*
- *Maximum parts interchangeability and simplicity of design result in minimum parts inventories and lower maintenance costs.*
- *All cages for a given valve size have constant bore diameters, therefore all plugs are interchangeable regardless of design, requiring fewer part replacements. (1 1/2" - 8" sizes)*
- *Cv reductions are achieved by reducing the area of the cage openings, not by changing its diameter or valve travel, thus eliminating the need for changing actuators.*

## Series V510/V520 Globe And Angle Valves 1/2"- 8" (DN15 - 200) ANSI Class 900-2500

The V510 (ANSI Class 900 and 1500) and V520 (ANSI Class 2500) Series control valves are heavy cage guided type globe and angle valves with "quick change" trim. Designed for high temperature and high pressure applications, these valves feature a close tolerance cage and seat ring for accurate, vibration free service. The pressure drop in this design occurs across the cage openings (ports) rather than the seating surface, thus minimizing seat wear and seat leakage. Applications include throttling and on/off control of non-gritty liquids, gases, and steam at moderate to high temperature and pressures.

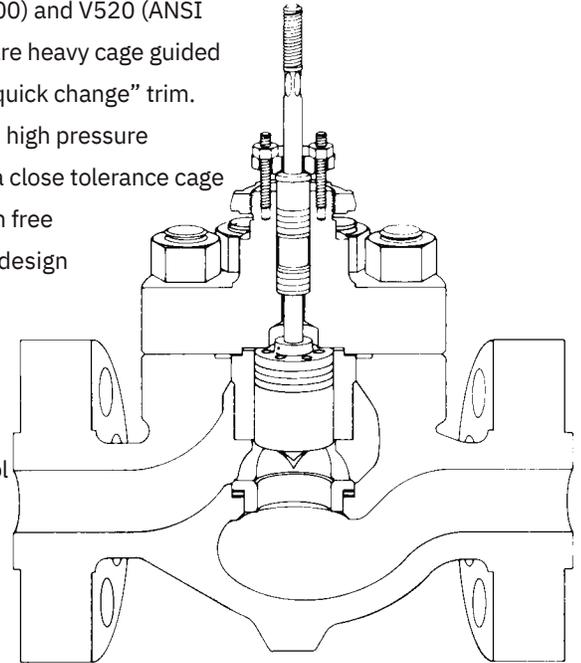

## Specifications

**Body Style:** Cage guided globe or angle

**Body Size:** 1/2" through 8" (15-200 mm)

**Body Rating:** ANSI Class 900, 1500 (1/2" through 8"); ANSI Class 2500 (1" through 3")

**Body Materials:** Carbon steel, stainless steel, chrome-moly steel, other castable alloys

**End Connections:** Socket weld, butt weld, raised face flange, ring type joint and others on application

**Bonnets:** Plain or extension

**Trim Style:** Balanced or unbalanced plug, standard ported or Flash Flo® cage, Q-Cage™, Q-Cage™ Level 2 and VeCTor™.

**Trim Characteristic:** Linear or equal percentage

**Flow Coefficient:** Cv from 0.40 through 680 (refer to Tables 3, 4, 5 and 6).

**Leakage Class:** ANSI Class II through V


**Actuators:** Standard bonnet mount will accept either spring-diaphragm or piston actuators. For actuator selection refer to KOSO Hammel Dahl actuator selection guide.

## Trim Designs

The V510 Series and the V520 Series are two separate product lines each designed to be a fully integrated, interchangeable system of parts. While all parts are common within each series, parts cannot be interchanged between series.

Standard trim sets for the 1/2" - 1" ANSI Class 900 and 1500 and 1" ANSI Class 2500 valve bodies include a seat ring, a cage that acts as the seat ring retainer and the guide for a contoured plug (Fig. 2). Trim sets for all other valve bodies are cages, seat rings and piston style plugs (Figures 1, 3, 6, 7, 8).


### Seat Ring and Cage Options



**Figure 1. Metal Seated Cage**


The standard cage construction is a cast cage with integral seat ring. The cage serves as a massive plug guide and the close tolerance fit eliminates plug vibrations at high differential pressures. The four cage openings are contoured to establish the flow characteristic. The cage shown has openings

which will provide equal percentage characteristic. A linear characteristic is also available.



**Figure 2. Contoured Trim (1/2"-1" ANSI Class 900, 1500 and 1" ANSI Class 2500)**

For the 1/2" - 1" globe valves the standard design is a cage with separable seat ring and cage guided contoured plug. In this design the flow area between the seat ring and the contoured plug is where throttling actually takes place.




**Figure 3. Flash-Flo®**

This unique cage has a series of diametrically opposed drilled holes that break the flow stream into many smaller streams. For liquid applications, the Flash Flo® trim is used as "flow into the cage".

Thus the high velocity streams impinge upon each other which dissipates the energy and keeps the cavitating liquid away from metal


valve parts. For gas/steam applications, the Flash Flo® trim is used as "flow out of the cage".

Thus the high velocity streams radiate out of the cage causing a redistribution of the acoustical energy with resultant noise attenuation.



**Figure 4. VeCTor™ Trim**

VeCTor™ trim is a radial flow, multi-stage stacked disk trim designed with constant area ratios that provide a torturous path controlled pressure drop at each stage. Use of this design minimizes the high velocity incompressible flow that creates noise or the critical pressure drops in liquid flow that creates cavitation. This product is offered as a standard linear, modified linear and modified equal percent flow characteristics. The disk stack is available in 316 SS, 410 SS and INCONEL®.




**Figure 5. Q-Cage™ and Q-Cage™ Level 2**

The Q-Cage™ trim is a drill hole cage design that utilized both the energy shift and mutual interference methods in compressible services for optimal noise reduction. This design can reduce noise generated by up to 20 dBA. In liquid (usually water) applications, it further limits the energy in each flow passage and also slightly

reduces the valve pressure recovery, further reducing the effects of cavitation damage. The Q-Cage™ is available with special linear and special modified flow characteristics.


The Q-Cage™ Level 2 trim incorporates the Q-Cage™ trim with a plug skirt that achieves up to another 10 dBA noise reduction by adding another pressure reducing stage to the trim. In this way, the Q-Cage™ Level 2 trim can handle higher energy levels, while providing lower noise generation and eliminating cavitation. Unlike other multi stage drilled hole trim, this design is the only one where both stages are active, meaning the flow area of both stages varies with plug stroke. The Q-Cage™ Level 2 is available with special modified flow characteristics.

### Plug and Seat Ring Options




**Figure 6. Balanced Plug**

The standard balanced plug is piston style, which has a primary metal seat and secondary bidirectional piston rings set in ring grooves. The pressure above the plug is equalized with the pressure below the seat ring by large vent holes which pass completely through the plug. In the closed position, the plug rests on the seating surface machined in the cage and the piston rings seal the annulus between the upper plug and cage.



**Figure 7. Optional Balanced Plug**

This unique design includes a special uni-directional, spring-loaded, pressure-energized TFE cup seal. Upstream pressure enters the seal cavity expanding the seal outward, sealing the annulus between the plug and cage walls.



**Figure 8. Unbalanced Plug**

The unbalanced plug (no vent holes) is used in only flow from under the plug applications. The plug is grooved along its sides to equalize pressure in the valve body above the seat with the pressure above the plug.


### Pilot Plug

For those applications where a tight shut-off is required and the service conditions exceed the required seal capabilities, a pilot plug is available. The standard flow direction is flow to close (i.e., from over the plug). The V510 Series and the V520 Series together fulfill the design concept of a streamline product offering which provides maximum versatility and flexibility, yet requires a minimum of inventory and maintenance time.

# Bonnet Types


## Plain Bonnet

A plain bonnet is used when the flow medium remains between -50 °F and +600 °F (-45 °C to +316 °C).

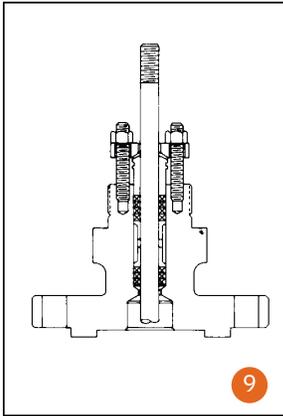

## Extension Bonnet

An extension bonnet is required for low temperature applications (below -50 °F or -45 °C) and high temperature applications (above +600 °F or +316 °C).

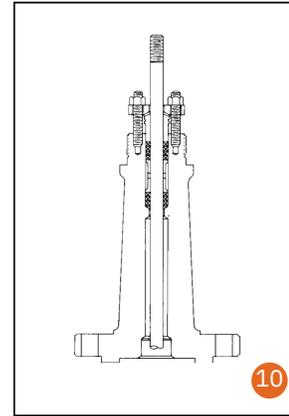

# Shutoff Performance

**Table 1. Valve Leakage Classes**

Plug Style	Seat Ring	Plug Seal	ANSI Class
Unbalanced	Metal	None	IV
			V‡
Balanced	Metal	PTFE piston ring / O-ring	IV
		Carbon Graphite	II
		Metal	III
		PTFE Cup Seal / spring	IV
		PTFE Cup Seal / spring	V‡

Above leakage classes as defined in ANSI B16.104.  
 ‡ Requires model code variable T.  
 Viton is a registered trademark of E.I. DuPont Co.

The unbalanced plug used in conjunction with any metal seat ring will provide Class IV or Class V shutoff.

The standard plug seal for temperatures below 400°F (204°C) is a PTFE piston seal energized by a Viton® “O”-ring (refer to Figure 14 for pressure and temperature limitations). Supplied with any metal seated cage, this seal will provide Class IV shutoff.

A plug seal for temperatures and pressures beyond the capability of the PTFE piston ring is carbon graphite. This seal supplied with any metal seated cage will provide Class II shutoff, for temperatures ranging between 400 to 1,000 °F (204 to 537 °C).

The standard plug seal for temperatures and pressures beyond the capability of the standard PTFE piston ring is a metal piston ring, which provides Class III shutoff, for temperatures ranging between 400 to 800 °F (204 to 426 °C).

For those applications where Class V shutoff is required in a balanced valve, a special spring-loaded pressure-energized PTFE cup seal is available to be used in conjunction with 28/30 seat angle surface. (Refer to Figure 14 for pressure and temperature limitations.)

**Table 2. Flow Direction**

NOTE: Flow direction must be specified at time of order entry.

Media	Plug	Cage	Flow Direction
Clean Liquids	Balanced	Ported	Flow Over
		Flash Flo®	
		Q-Cage™	
		Q-Cage™ Level 2	
	Unbalanced	Ported	Flow Under
		Flash Flo®	Consult Factory
		Q-Cage™	Flow Under
		Q-Cage™ Level 2	
Gas or Steam	Balanced	Ported	Flow Over
		Flash Flo®	Flow Under
		Q-Cage™	
		Q-Cage™ Level 2	
	Unbalanced	Ported	Flow Under
		Flash Flo®	Consult Factory
		Q-Cage™	
		Q-Cage™ Level 2	

## Flow Data

**Table 3. V510 and V511 Balanced, 1-1/2" - 8", ANSI Class 900-1500  
Flow Coefficient (Cv) at Maximum Travel**

Cage Style	Flow Characteristics	Size	Size Code	Valve Sizes— inches (mm)					
				1-1/2 (40)	2 (50)	3 (80)	4 (100)	6 (150)	8 (200)
Ported	Equal Percentage	Full Size	A	28	50	95	160	330	560
		1 Reduction	B	20	32	54	95	200	340
		2 Reduction	C	13	21	38	60	114	185
	Linear	Full Size	A	28	54	110	180	365	590
		1 Reduction	B	20	34	65	114	230	390
		2 Reduction	C	13	21	42	68	140	245
Flash Flo®	Equal Percentage	Full Size	A	29	46	105	135	296	630
		1 Reduction	B	18	39	69	87	192	320
		2 Reduction	C	10	29	42	54	117	180
	Linear	Full Size	A	28	40	83	127	350	680
		1 Reduction	B	19	26	50	82	225	285
		2 Reduction	C	11	17	37	50	135	165
Q-Cage™	Equal Percentage	Full Size	A	11	11	27	37	83	160
		1 Reduction	B	6	6	18	30	66	120
		2 Reduction	C	-	-	9	22	50	80
	Linear	Full Size	A	18	19	46	63	141	263
		1 Reduction	B	9	9	31	50	113	199
		2 Reduction	C	-	-	17	40	89	141
Q-Cage™ Level 2	Equal Percentage	Full Size	A	11	12	39	44	99	236
		1 Reduction	B	-	-	20	30	66	158
		2 Reduction	C	-	-	-	1	3	12
	Linear	Full Size	A	17	17	57	70	157	362
		1 Reduction	B	-	-	29	47	105	246
		2 Reduction	C	-	-	-	34	76	178
VeCTor	Equal Percentage / Linear	Consult Factory	Consult Factory						

NOTE: V511 only available up to 6-inch (150 mm)

**Table 4. V512 and V513 Unbalanced, 1/2" - 1", ANSI Class 900-1500  
Flow Coefficient (Cv) at Maximum Travel**


Cage Style	Flow Characteristics	Size	Size Code	Valve Sizes— inches (mm)		
				1/2 (15)	3/4 (20)	1 (25)
Contoured	Equal Percentage	Full Size	A	5.4	9.0	13.5
		1 Reduction	B	3.5	5.4	9.0
		2 Reduction	C	1.8	3.5	5.4
		3 Reduction	D	1.4	1.8	3.5
		4 Reduction	E	1.0	1.4	1.8
		5 Reduction	F	0.67	1.0	1.4
		6 Reduction	G	-	0.67	1.0
	7 Reduction	H	-	-	0.67	
	Linear	Full Size	A	3.5	6.0	13.0
		1 Reduction	B	2.5	3.5	6.0
		2 Reduction	C	1.7	2.5	3.5
		3 Reduction	D	1.1	1.7	2.5
		4 Reduction	E	0.63	1.1	1.7
		5 Reduction	F	0.4	0.63	1.1
6 Reduction		G	-	0.4	0.63	
7 Reduction	H	-	-	0.4		




## Material Selection

These charts should be used as a guide to select the pressure class and trim material combination. The set of curves sloping downward to the right are the pressure rating curves for each ANSI pressure class listed in ANSI B16.34. In each case the curve designates the maximum pressure and temperature for the class listed directly below the curve. The bold boundaries mark the recommended pressure and temperature limits for trim material combinations listed in Table 7. These recommendations are generalized and may be subject to adjustment based upon other considerations determined during the valve sizing process.


**Figure 11. Trim Chart For Carbon Steel Body**  
(ASTM A 216, WCB)

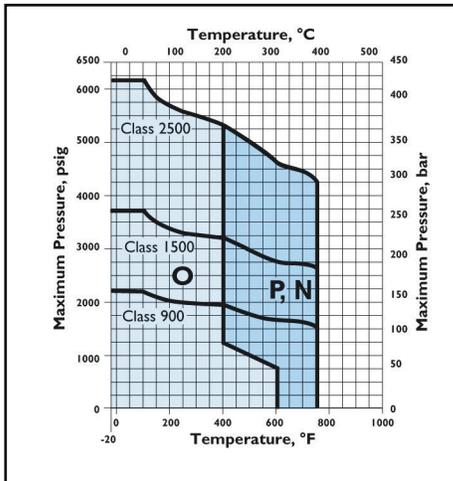


**Figure 12. Trim Chart For Stainless Steel Body**  
(ASTM A 351, CF8M)

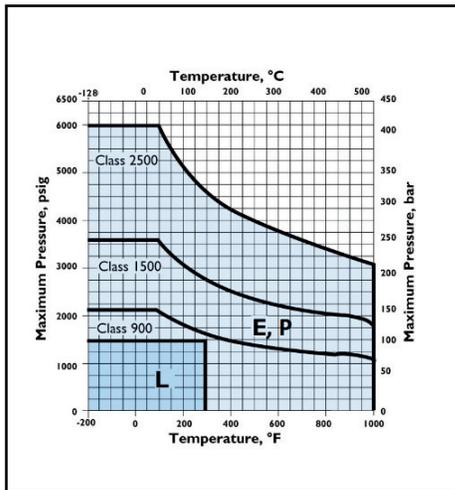

**Figure 13. Trim Chart For Chrome-Moly Body**  
(ASTM A 217, WC9)

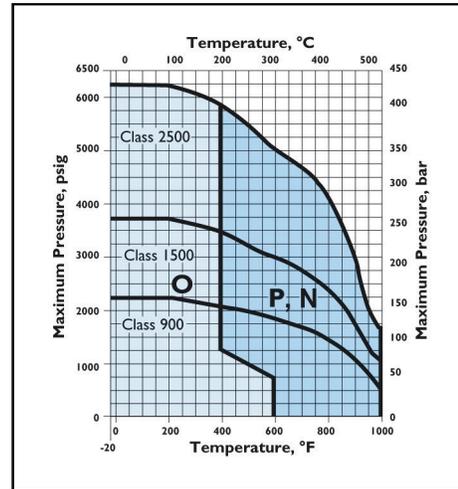

**Figure 14. TFE Plug Seal Rating Chart**

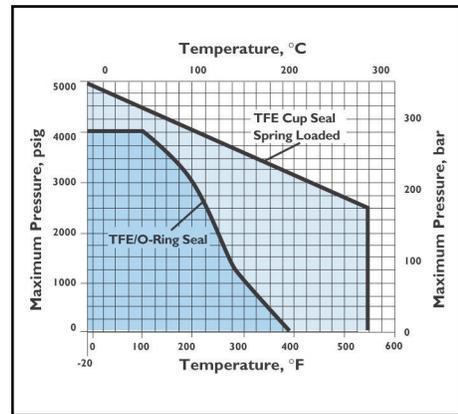


**Figure 15. Hard Facing**

Two styles of hard-facing are provided for difficult service applications.

HFS is 316 stainless steel base material with hard-facing on the seating surfaces of the plug and cage.

HFS & G is 316 stainless steel base material with hard-facing on the seating surfaces of the plug and cage and the plug guiding surfaces.

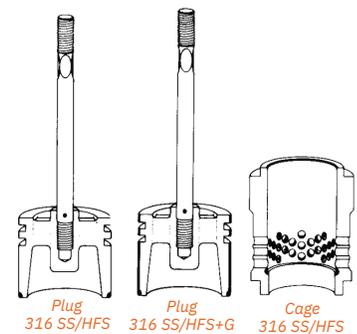

**Table 7. Trim Materials**

Trim Code	Plug	Seat Ring	Cage	Stem
E	316 SS/HFS+G	316 SS/HFS+G	316 SS/HFS+CP	316 SS
L	316 SS/HFS	316 SS/HFS	316 SS/HFS+CP	316 SS
N	416 SS/N	416 SS/N	416 SS	316 SS
O	416 SS	416 SS	17-4 PH/CP	316 SS
P	316 SS/HFS+G	316 SS/HFS+G	ALLOY 6	316 SS


**NOTES TO TABLE AND TRIM CHARTS**

- a) Above +600 °F (316 °C) extension bonnet is required.
- b) For service temperature above +1 000 °F (+538 °C) contact your local representative.
- c) Unless otherwise specified, the hard-facing is Alloy 6.
- d) CP = Chrome plated. N = Nitrided.
- e) KOSO Hammel Dahl reserves the right to substitute materials when appropriate based upon service or availability.

# Dimensional Data

**Table 8. V510, V512, V520, V522**  
Globe Body Dimensional Data—inches (mm) ANSI Classes 900-2500

Body Size Inches (mm)	Travel	A										C		D			
		Socket Weld		Raised Face Flanged			Ring-Type Joint Flanged			Butt Weld				Plain Bonnet		Extension Bonnet	
		Class 900-1500	Class 2500	Class 900	Class 1500	Class 2500	Class 900	Class 1500	Class 2500	Class 900-1500	Class 2500	Class 900-1500	Class 2500	Class 900-1500	Class 2500	Class 900-1500	Class 2500
1/2 (13)	1.00 (25)	11.00 (279)	—	—	—	—	—	—	—	—	—	2.62 (67)	—	5.88 (149)	—	10.00 (254)	—
3/4 (20)	1.00 (25)	11.00 (279)	—	11.50 (292)	11.50 (292)	—	—	—	—	—	—	2.62 (67)	—	5.88 (149)	—	10.00 (254)	—
1 (25)	1.00 (25)	11.00 (279)	12.50 (318)	11.50 (292)	11.50 (292)	12.50 (318)	11.50 (292)	11.50 (292)	12.50 (318)	—	—	2.62 (67)	3.25 (83)	5.88 (149)	8.38 (213)	10.00 (254)	12.50 (318)
1-1/2 (40)	1.13 (29)	13.00 (330)	15.00 (381)	13.12 (333)	13.12 (333)	15.00 (381)	13.12 (333)	13.12 (333)	15.12 (384)	13.00 (330)	14.125 (359)	3.38 (86)	3.56 (90)	6.60 (168)	8.38 (213)	11.44 (291)	13.06 (332)
2 (50)	1.13 (29)	14.75 (375)	15.75 (400)	14.75 (375)	14.75 (375)	16.25 (413)	14.88 (378)	14.88 (378)	16.38 (416)	14.75 (375)	15.75 (400)	3.75 (95)	4.06 (103)	7.34 (186)	8.75 (222)	11.56 (294)	14.56 (370)
3 (80)	1.50 (38)	—	—	17.38 (441)	18.12 (460)	26.00 (660)	17.50 (445)	18.25 (464)	26.25 (667)	18.12 (460)	19.62 (498)	4.88 (124)	7.38 (187)	10.12 (257)	16.50 (419)	12.62 (321)	24.00 (610)
4 (100)	1.50 (38)	—	—	20.12 (511)	20.88 (530)	29.00 (737)	20.25 (514)	21.00 (533)	29.25 (743)	20.88 (530)	22.68 (576)	5.56 (141)	8.38 (213)	11.12 (282)	12.88 (327)	13.88 (353)	—
6 (150)	2.25 (57)	—	—	28.12 (714)	30.25 (768)	—	28.25 (718)	30.50 (775)	—	30.25 (768)	—	7.00 (178)	—	18.63 (473)	—	26.13 (664)	—
8 (200)	3.50 (89)	—	—	36.00 (914)	38.25 (972)	—	36.12 (917)	38.62 (981)	—	32.75 (832)	—	10.00 (254)	—	17.88 (454)	—	22.12 (562)	—

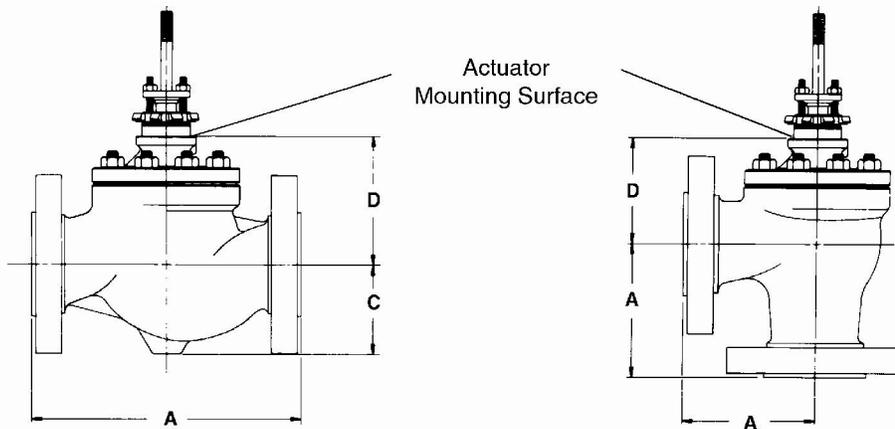

**Table 9. V511, V513, V521, V523**  
Angle Body Dimensional Data—inches (mm) ANSI Classes 900-2500

Body Size Inches (mm)	Travel	A										D			
		Socket Weld		Raised Face Flanged			Ring-Type Joint Flanged			Butt Weld		Plain Bonnet		Extension Bonnet	
		Class 900-1500	Class 2500	Class 900	Class 1500	Class 2500	Class 900	Class 1500	Class 2500	Class 900-1500	Class 2500	Class 900-1500	Class 2500	Class 900-1500	Class 2500
1/2 (13)	1.00 (25)	5.50 (140)	—	—	—	—	—	—	—	—	—	5.88 (149)	—	10.00 (254)	—
3/4 (20)	1.00 (25)	5.50 (140)	—	5.75 (146)	5.75 (146)	—	—	—	—	—	—	5.88 (149)	—	10.00 (254)	—
1 (25)	1.00 (25)	5.50 (140)	6.25 (159)	5.75 (146)	5.75 (146)	6.25 (159)	5.75 (146)	5.75 (146)	6.25 (159)	—	7.50 (191)	5.88 (149)	8.38 (213)	10.00 (254)	12.50 (318)
1-1/2 (40)	1.13 (29)	6.50 (165)	7.50 (191)	6.56 (167)	6.56 (167)	7.50 (191)	6.56 (167)	6.56 (167)	7.56 (192)	—	7.88 (200)	6.62 (168)	8.38 (213)	11.44 (291)	13.06 (332)
2 (50)	1.13 (29)	7.38 (187)	7.88 (200)	7.38 (187)	7.38 (187)	8.12 (206)	7.44 (189)	7.44 (189)	8.19 (208)	—	13.00 (330)	7.38 (187)	8.75 (222)	11.56 (294)	14.56 (370)
3 (80)	1.50 (38)	—	—	8.69 (221)	9.06 (230)	—	8.75 (222)	9.12 (232)	—	9.06 (230)	—	10.12 (257)	—	12.62 (321)	—
4 (100)	1.50 (38)	—	—	10.06 (256)	10.44 (265)	—	10.12 (267)	10.50 (267)	—	10.44 (265)	—	11.12 (282)	—	13.88 (353)	—
6 (150)	2.25 (57)	—	—	14.06 (357)	15.12 (384)	—	14.12 (359)	15.25 (387)	—	15.12 (384)	—	14.00 (356)	—	18.69 (475)	—

Globe style face-to-face dimensions are in accordance with ANSI/ISA 75.08.06 for raised face flanged valves.

## How To Order

To completely specify a control valve, make a selection from each category in the Valve Model Coding System below. The assembled codes create a complete valve model number. The Valve Model Coding System displays the standard product offering for this product line. An extensive number of options and variations exist, which are not listed. For options not shown or to enter an order, contact your local sales representative.

1 Series Models	
ANSI Class 900, 1500	
V510	Balanced, Globe
V511	Balanced, Angle
V512	Unbalanced, Globe
V513	Unbalanced, Angle
ANSI Class 2500	
V520	Balanced, Globe
V521	Balanced, Angle
V522	Unbalanced, Globe
V523	Unbalanced, Angle

2 Body Size	
D	1/2" (13 mm)
E	3/4" (20 mm)
F	1" (25 mm)
H	1-1/2" (40 mm)
J	2" (50 mm)
L	3" (80 mm)
N	4" (100 mm)
Q	6" (150 mm)
S	8" (200 mm)

3 Body Rating	
M	ANSI Class 900
N	ANSI Class 1500
R	ANSI Class 2500*

\* 1-inch through 3-inch valves only

4 Body Material	
C	Carbon Steel (ASTM A216, WCB)
E	Stainless Steel (ASTM A351, CF8M)
2	Chrome-Moly Steel (ASTM A217, WC9)

5 End Connections	
3	Raised Face Flange
5	Ring Type Joint Flange
6	Socket Weld **
9	Butt Weld Sch. 80 *
A	Butt Weld Sch. 160

\* ANSI Class 900 and 1500 only

\*\* Up to 2-inch valves

6 Bonnet Type	
2	Plain
3	Extension

7 Trim Characteristics	
C	Linear, Ported
E	Equal Percent, Ported
F	Flash Flo®, Equal Percent
H	Flash Flo®, Linear
Q	Q-Cage™, Linear
R	Q-Cage™ Level 2, Linear (FTO)
S	Q-Cage™ Level2, Linear (FTC)
V	VeCTor™, Linear

8 Trim Size	
A	Full Size
B	1 Reduction
C	2 Reduction

**NOTE:** Refer to Cv tables on pages 4 and 5 for additional options.

9 Trim Materials				
Trim Code	Plug	Seat Ring	Cage	Stem
E	316 SS/HFS+G	316 SS/HFS+G	316 SS/HFS+CP	316 SS
L	316 SS/HFS	316 SS/HFS	316 SS/HFS+CP	316 SS
N	416 SS/N	416 SS/N	416 SS	316 SS
O	416 SS	416 SS	17-4 PH/CP	316 SS
P	316 SS/HFS+G	316 SS/HFS+G	ALLOY 6	316 SS

10 Packing/Plug Seal Materials	
-200 °F to +450 °F (-129 °C to +232 °C)	
G	PTFE V-Ring with Packing Spacer
U	PTFE Impregnated PTFE Braid Ring
+450 °F to +900 °F (+232 °C to +482 °C)	
9	Laminated Graphite Ring

11 Variations	
—	None
A	Body Drain (1/2" NPT)
B	Plug Seal Ring - Metal
J	Plug Seal Ring - TFE/O-Ring
K	Plug Seal Ring - Carbon Graphite
L	17-4 PH Stem
N	Plug Seal Ring - TFE Cup Seal, Spring Loaded
S	NACE MR-01-75 / ISO 15156 Compliance
T	Class V Leakage (28/30 Degree Seat Angle)
8	Stainless Steel Body Studs and Nuts
9	Stainless Steel Lubricator and Isolating Valve

**NOTE:** If more than one variation is required, use code "Z" and describe each variation.

**NOTE:** A plug seal must be specified in the variation code for all balanced style valves.

**NOTE:** Flow direction must be specified at time of order entry.

## D/R Series Linear Spring Diaphragm Pneumatic Actuators

KOSO Hammel Dahl linear spring diaphragm pneumatic actuators are rugged units designed for reliable operation of linear control valves. The available combinations of case sizes, strokes, and springs precisely satisfy a wide range of application requirements.

### FEATURES

- *Rolling diaphragm provides excellent sensitivity and provides maximum constant effective area which translates into improved linearity.*
- *Modular construction provides maximum part interchangeability between direct and reverse-acting models and between selected case sizes.*
- *High spring rates improve control valve stability.*
- *Minimal guiding assures low hysteresis in reverse-acting models—zero hysteresis in direct-acting models.*
- *Stainless steel stems are standard for maximum performance in corrosive environments.*

## Specifications

**Diaphragm Cases:** Pressed steel

**Stem:** 303 SS

**Diaphragm:** Dacron reinforced nitrile

**Spring Barrel:** Cast Iron

**Temperature Limits:** -40°F to +180°F (-40°C to +82°C)


**Standard Spring Spans:** 12 psi and 24 psi (.8 bar and 1.7 bar)  
(other spans and spring preloads available on application)

## Positioners

The NP700A and NE700A are proportional positioners for globe valve throttling applications. The NP is a fully pneumatic unit while the NE is an electro-pneumatic unit that provides pneumatic out-put proportional to a standard millampere DC Input. The ND9100 digital positioner provides extensive monitoring for diagnostics and better response speed. Used with D/R Series diaphragm actuators, these units improve repeatability and accuracy while providing increased force to reduce actuator sizes. Several industry-recognized brands are offered. Others are available upon request.

## Other Accessories

Additional accessories available for mounting with linear control valves include, but are not limited to transducers, limit switches, lock-up valves, solenoid valves and amplifying relays. Please consult the factory for complete details.

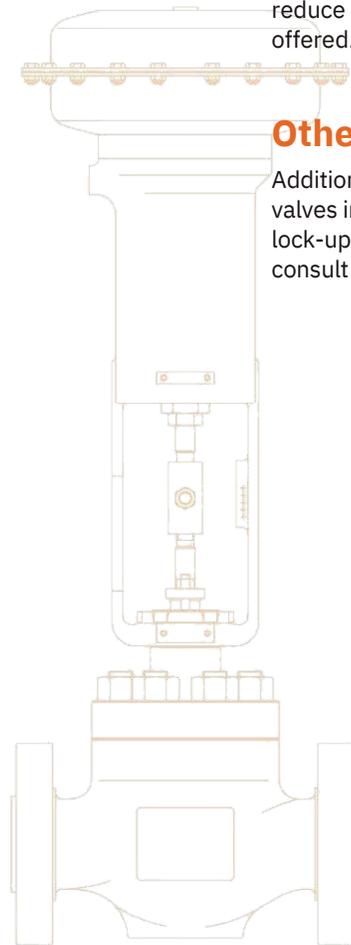

### KOSO HAMMEL DAHL

253 Pleasant Street  
W.Bridgewater, MA 02379

Telephone: 774.517.5300

Fax: 774.517.5230

[www.hammeldahl.com](http://www.hammeldahl.com)

07/24

**KOSO VECTOR kentintrol™**

**REDA**  
ELECTRAULIC™ ACTUATION

**PARCOL™**

CONTROL VALVES

# KOSO HAMMEL DAHL